




## 郑州高德机械设备有限公司 Gaode Equipment Co., Ltd.

地址 ADD: 郑州市金水区丰庆路 4 号院 14 号楼 9 号 邮编 P.C.:450053  
No.9, Building 14, Yard No.4, Fengqing Road, Jinshui District, Zhengzhou, Henan China  
网站 (Web) :www.gaodetec.com E-Mail: info@gaodetec.com

### GDPX Refractory mixing and conveying unit

#### Description

GDPX Refractory mixing and conveying unit is specially designed for conveying of solid and moistened mortar, concrete mixture and refractory castable. It is suitable for the using in the metallurgical industry produce permanent linings for ladles, tundish, blast furnace runners, on industrial and melting furnaces for the glass and aluminium industry. The machine can be used also in the building (construction) industry at the concreting of base of building, floors and larger concreted areas.

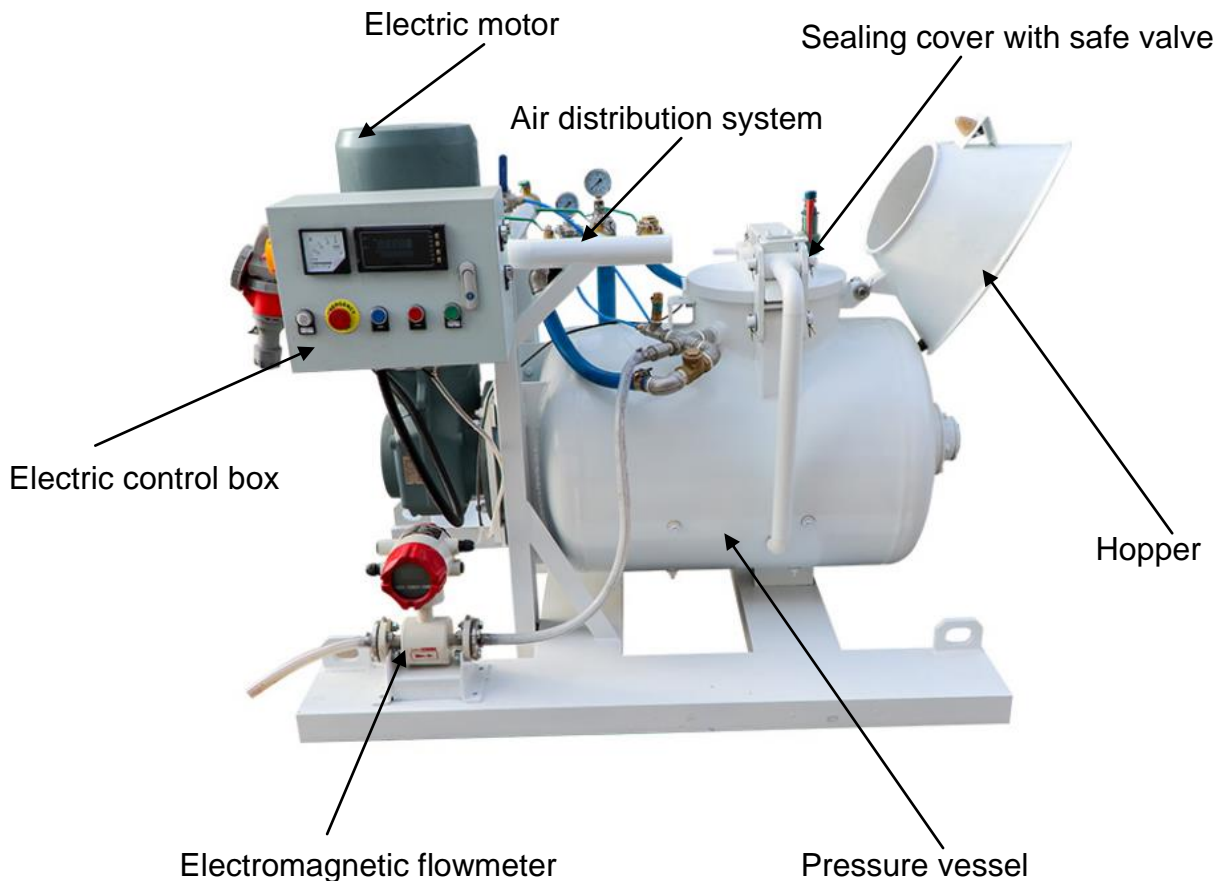

#### Working principle

Mixture closed in the pressure tank will be mixed by motion of mixing blades and by the compressed air. Mixing blades slide simultaneously the mixture and push it into the discharge port of the tank. Additionally, lower position compressed air entering into the conveying hose and blow mixture uniform motion of in transport hoses. Transport of the mixture in the conveying hose passes in agglomerates, and unique swirling air path design makes the materials will not produce large fluctuations.




# 郑州高德机械设备有限公司

## Gaode Equipment Co., Ltd.

地址 ADD: 郑州市金水区丰庆路 4 号院 14 号楼 9 号 邮编 P.C.:450053  
No.9, Building 14, Yard No.4, Fengqing Road, Jinshui District, Zhengzhou, Henan China  
网站 (Web) :www.gaodetec.com E-Mail: info@gaodetec.com

### Application

- ★ Manufacture and transport of solid and damp concrete mixture and refractory materials.
- ★ In metallurgy, for pig iron production, spout and gutter concreting, in steel production for steel ladle and lid concreting etc.
- ★ In civil engineering, for structure foundation floor and large concrete area pumping.



Internal mixing system



Special swirl adding air design

### Advantage

- ★ Rigid and compact mixing and conveying unit;
- ★ Exact electronically water dosage system;
- ★ Mixture of consistently homogenous mixing quality;
- ★ Easy to handle system regarding installation, conveying and cleansing;
- ★ Saving of man power and cost;
- ★ Conveying of materials which are difficult to pump.



# 郑州高德机械设备有限公司

## Gaode Equipment Co., Ltd.

地址 ADD: 郑州市金水区丰庆路 4 号院 14 号楼 9 号 邮编 P.C.:450053  
No.9, Building 14, Yard No.4, Fengqing Road, Jinshui District, Zhengzhou, Henan China  
网站 (Web) :www.gaodetec.com E-Mail: info@gaodetec.com

### Technical Data

Model	GDPX200	GDPX500	GDPX600
Output capacity	4m <sup>3</sup> /h	10m <sup>3</sup> /h	10m <sup>3</sup> /h
Useful vessel volume	200L	500L	600L
Total vessel volume	250L	660L	800L
Max. Grain size of mixture	16mm	32mm	32mm
Electric motor power	11Kw	22Kw	30Kw
Conveying distance	Horizontal 100m, Vertical 40m		
Operating pressure	0.2~0.4Mpa	0.2~0.4Mpa	0.2~0.4Mpa
Max. vessel pressure	0.8Mpa	0.8Mpa	0.8Mpa
Required compressed air	4~6m <sup>3</sup> /min	5~10m <sup>3</sup> /min	5~10m <sup>3</sup> /min
Dimension	1.55x1.55x1.25m	2.88x1.4x1.85m	3.32x1.4x1.85m
Weight	668Kg	1640Kg	1740Kg

